


RT-1D11

Double-Sided Scrim Tape

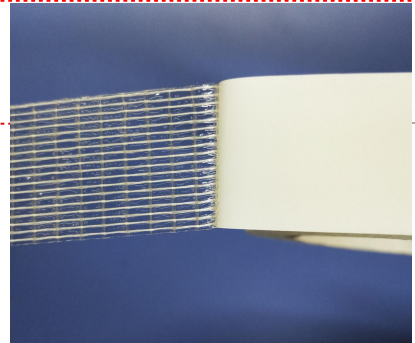

Product Description

It is a double sided Tape with Glass Fibre Scrim, release plastic film as liner. The Glass Fibre Scrim provides high strength, acrylic adhesive provides good adhesion to a variety of surfaces. Because of its high rip-resistance and low elongation the adhesive tape is appropriate for stabilizing rubber profiles and sealing tapes, especially on EPDM- based profiles. Limited consistency in the presence of chemicals inclined to migrate (plasticisers).

Main Application

- * Gaskets (weather strips) of windows & doors.
- * Home decoration
- * etc

Construction

*Liner:	Plastic film	*Adhesive:	Acrylic adhesive
*Liner color:	White	*Carrier:	Glass Fibre Scrim

Typical Physical Properties

Note: The following technical information and data should be considered representative or typical only, and should not be used for specification purposes.

Typical Physical Properties

Liner Thickness:	0.05 mm	ASTM D-3652
Thickness without liner:	0.18 ±0.01 mm	ASTM D-3652
Adhesion to Steel:	15±5 N/25mm	ASTM D-3330
Tensile strength:	≥ 300 N/25mm	ASTM D-3759
Elongation at Break:	4~6%	ASTM D-3759
Service Tem recommended:	-20 °C to 120°C	

Storage Conditions

Store behind present stock. Store in a clean, dry place. Temperature of 4~26 °C (40~80 °F) and 40~50% relative humidity are recommended. Rotate your stock.

[Rudder\(Xiamen\) Industrial Co.,Ltd.](http://www.ruddertape.com)

E: sales@ruddertape.com
Website: www.ruddertape.com

Rudder Tape products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All information and recommends are provided to the best of our knowledge on the basis of our practical experience. Nevertheless R.T can make no warranties, express or implied, including, but no limited to any implied warranty of merchantability or fitness for a particular purpose. Therefore, the user is responsible for determining whether the R.T products is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our staff will be glad to advise you.